



REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

SALES

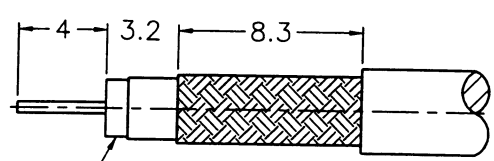


REMOVE FOIL 1mm MIN.
(去除箔襯 1mm 以上)



RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)



RECOMMENDED
MOUNTING HOLE
(建議架設孔)

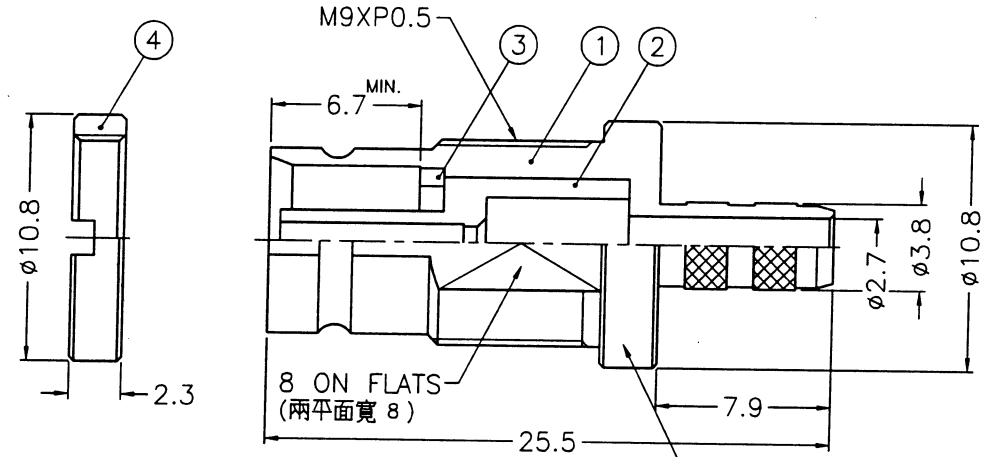

STAMP (IF ANY)
噴字 (若有要求)

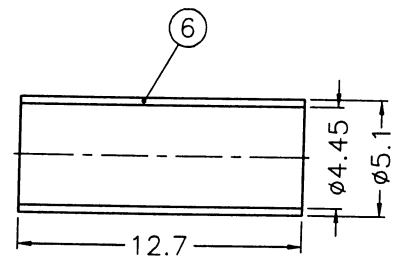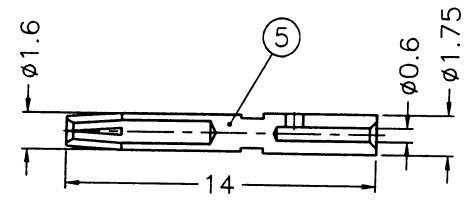

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 3. PHOSPHOR BRONZE PER QQ-B-750
 4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 5. TEFLON MIL-P-19468
 6. JIS H 3250, C 2700

1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
2. CONTACT PIN TO SOLDER
3. MAX. PANEL THICKNESS=3mm

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	3/1	ISSUE	A	
6	FERRULE	NOTE 6	NOTE 2	1	FR-51/445X127	DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4	PART NO.			
5	CONTACT PIN	NOTE 3	NOTE 4	1	1566421A1-5-175/06		166411AAA37NF7F			
4	NUT	NOTE 1	NOTE 2	1	RN108-9-05X23S		APPROVED	<i>Mark C</i>	DATE	08-21-01'
3	LOCK RING	NOTE 1	NOTE 4	1	S931-750-3		CHECKED	<i>Jacky</i>	DATE	08-21-01'
2	INSULATOR	NOTE 5	NATURAL	1	1566421A1-3T-75		DRAWN	<i>Jacky</i>	DATE	08-21-01'
1	BODY	NOTE 1	NOTE 4	1	1566421A1-1-38/27		Amphenol - Kai Jack TAINAN TAIWAN TITLE: 1.6/5.6 CRIMP JACK (FOR FLEX-3/75 CABLE) DRAWING NO. KJ-1566411A1-N/3GT3G-FLEX-3-75 FILE NO. F:\ND\16\6411\AAA\37\7F\NF			