




REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUES\DATE
A1	D-7	DELETE STAMP\N/A\04-30-04'


SALES

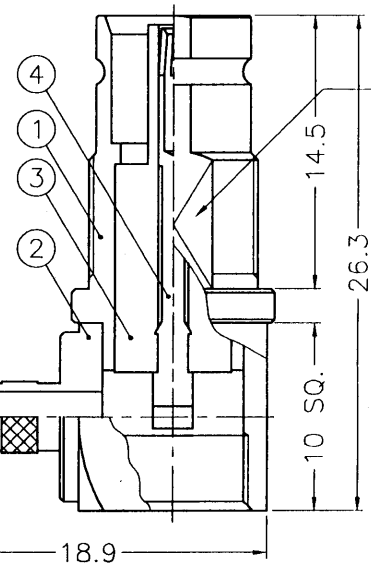

RECOMMENDED MOUNTING HOLE (建議架設孔)




8 ON FLATS (兩平面寬 8)

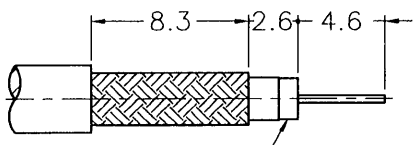


REMOVE FOIL 1mm MIN. (去除箔襯1mm以上)

RECOMMENDED CABLE STRIPPING DIM'S (建議剝線尺寸)

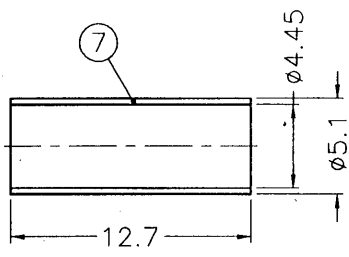

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
 - NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - PHOSPHOR BRONZE PER QQ-B-750
 - GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - TEFLON MIL-P-19468
 - JIS H 3250, C 2600

- CRIMPED FERRULE HEX CRIMP SIZE .178"
- CONTACT PIN TO SOLDER



ISSUED
2004. 5. 03
R & D

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
8	NUT			1	RN108-9-05X23S
7	FERRULE			1	FR-51/445X127
6	NUT			1	15687061606-5
5	INSULATOR	DELTRIN	NATURAL	1	15687061606-4
4	CONTACT PIN			1	1566412A1-4-B
3	INSULATOR			1	1566412A1-3-B
2	BODY			1	1566412A1-2-38/27
1	OUT CONTACT			1	1566412A1-1

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED TOLERANCES

0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

PART NO.	
APPROVED	DATE 04-30-04'
CHECKED	DATE 04-30-04'
DRAWN	DATE 04-30-04'

Amphenol	
Danbury,CT,USA-Tainan,Taiwan-Shenzhen,China	
TITLE	1.6/5.6 R/A CRIMP JACK (FOR FLEX-3/75 CABLE)
DRAWING NO.	1566412A1-N/3GT3G-FLEX-3-75
ITEM NO.	166412AAC37NF7F