



1 2 3 4 5 6 7 8

| REVISIONS | | |
|-----------|------|---------------------------|
| ISS | ZONE | DESCRIPTION\APPROVED\DATE |
| | | |

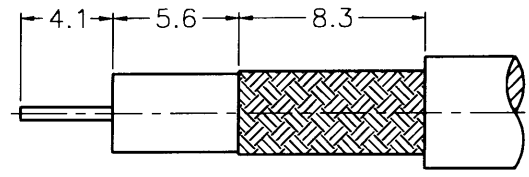

RECOMMENDED
CABLE STRIPPING DIM'S

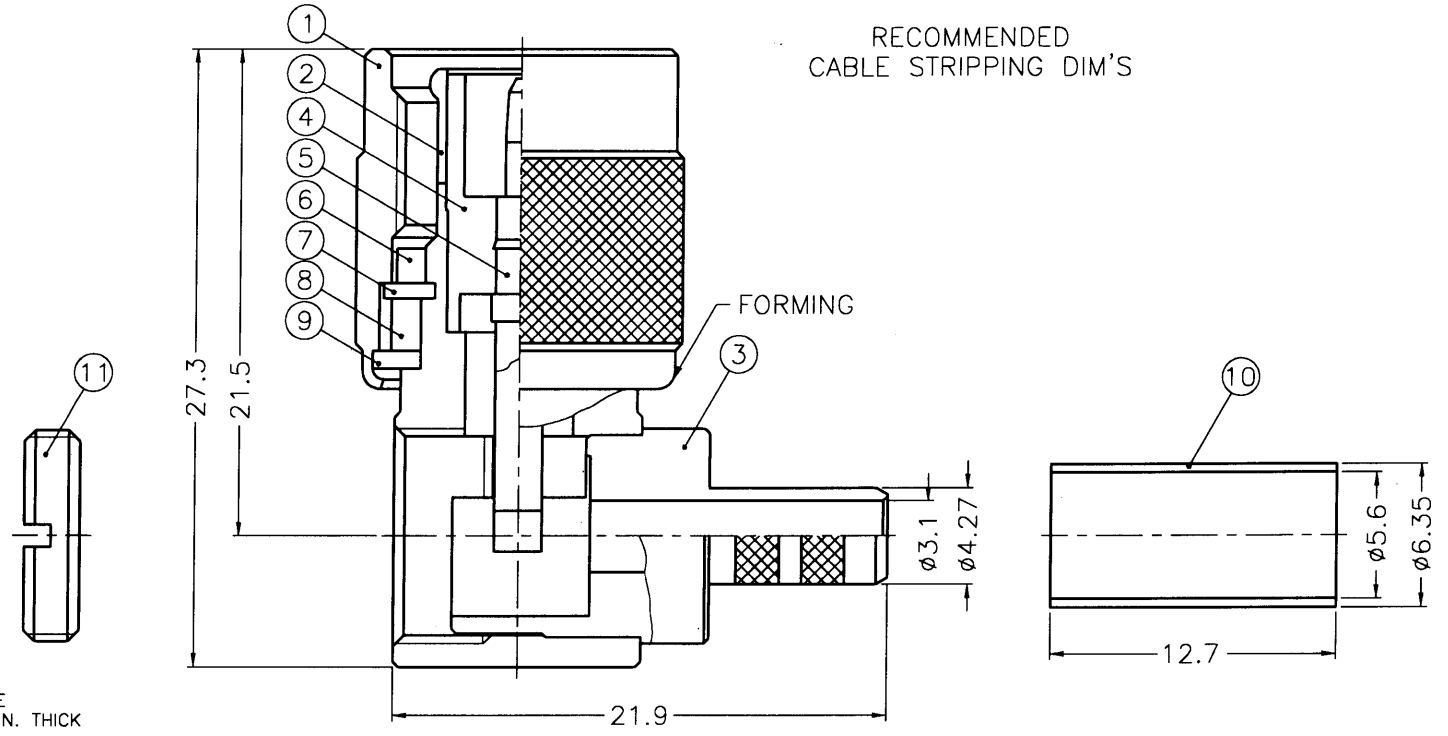

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
 1. BRASS PER QQ-B-626
 2. BRASS PER QQ-B-613
 3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 5. JIS H 3250, C 2700

| 11 | NUT | NOTE 1 | NOTE 3 | 1 | B5291-14 |
|-----|---------------|----------|---------|------|----------------|
| 10 | FERRULE | NOTE 5 | NOTE 3 | 1 | FR-635/56X127 |
| 9 | WASHER | NOTE 2 | NOTE 3 | 1 | WS-128/9X08 |
| 8 | RING | DELTRIN | NATURAL | 1 | T50000-6-A |
| 7 | RETAINER RING | NOTE 1 | NOTE 3 | 1 | B50000-5 |
| 6 | GASKET | RUBBER | RED | 1 | GS-105/8X15 |
| 5 | CONTACT PIN | NOTE 1 | NOTE 4 | 1 | B5091-6-50 |
| 4 | INSULATOR | DELTRIN | NATURAL | 1 | B50002-3-50 |
| 3 | BARREL | NOTE 1 | NOTE 3 | 1 | B5091-3-427/31 |
| 2 | HOUSING | NOTE 1 | NOTE 3 | 1 | B5091-2 |
| 1 | SHELL | NOTE 1 | NOTE 3 | 1 | T50000-1-B |
| NO. | DESCRIPTION | MATERIAL | FINISH | Q'TY | DRAWING NO. |

| | | |
|---------------------------------------|---------|--|
| DIMENSIONS ARE IN MILLIMETERS | | PART NO. |
| UNLESS OTHERWISE SPECIFIED TOLERANCES | | APPROVED <i>[Signature]</i> DATE 09-04-98' |
| 0.5-6 = ±0.2 | | CHECKED <i>[Signature]</i> DATE 09-04-98' |
| 6-30 = ±0.4 | | DRAWN <i>[Signature]</i> DATE 09-04-98' |
| 30-120 = ±0.6 | | |
| 120-315 = ±1 | | |
| 315-1000 = ±1.6 | | |
| 1000-2000 = ±2.4 | | |
| SCALE 3/1 | ISSUE A | |

| | |
|---|--|
| <p>KAI JACK INDUSTRIAL CO., LTD. TAINAN TAIWAN R.O.C.</p> | |
| TITLE TNC R/A CRIMP PLUG | |
| DRAWING NO. KJ-T1112A1-ND3G-223U-50 | |
| FILE NO. F:\DWG\T\1112A1\223U-50\ND3G | |

F
E
D
C
B
A

F
E
D
C
B
A

1 2 3 4 5 6 7 8

8720887