

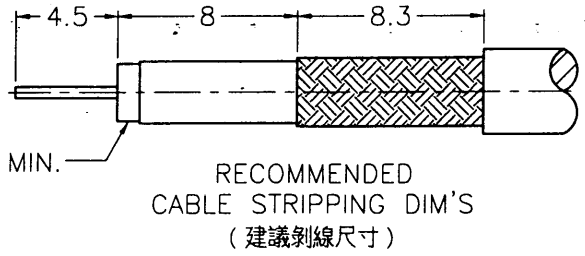
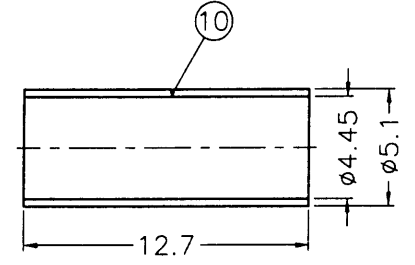


REVISIONS			
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE	
B1	A-2	NO.2 WAS CHANGED\RD-DM92121501E\12-16-03'	

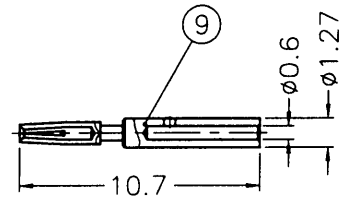

SALES

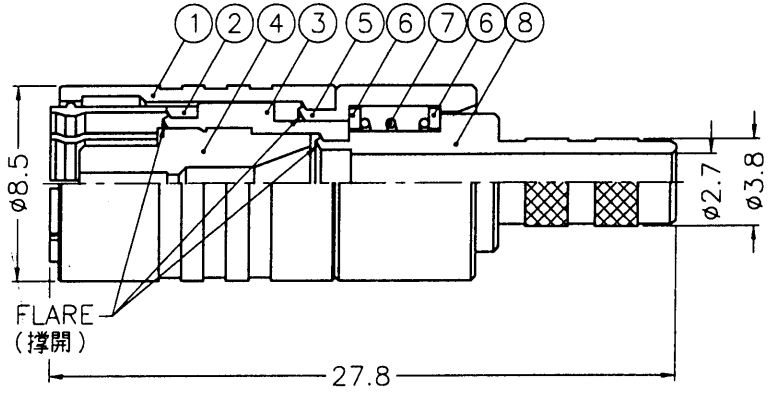

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
 - NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - BERYLLIUM COPPER PER QQ-C-530
 - GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - TEFLON MIL-P-19468
 - JIS H 3250, C 2600

ISSUED
2003.12.16
K&D

- CRIMPED FERRULE HEX. CRIMP SIZE .178"
- CONTACT PIN TO SOLDER

10	FERRULE	NOTE 7	NOTE 2	1	FR-51/445X127
9	CONTACT PIN	NOTE 4	NOTE 5	1	CP26AAP02A
8	BARREL	NOTE 1	NOTE 2	1	BR00AMG01A
7	SPPING	SWP 80	NATURAL	1	SMZ6121L2-7
6	RETAINER RING	NOTE 4	NATURAL	2	SMZ6121L2-6
5	HOUSING	NOTE 1	NOTE 2	1	SMZ6121L2-5
4	INSULATOR	NOTE 6	NATURAL	1	SMZ6121L2-4T-75
3	BODY	NOTE 1	NOTE 2	1	SMZ6121L2-3
2	OUTER CONTACT	NOTE 4	NOTE 3	1	SMZ6121L2-2-B
1	SHELL	NOTE 1	NOTE 2	1	SMZ6121L2-1

DIMENSIONS ARE IN MILLIMETERS				PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES				APPROVED	DATE
0.5-6	= ±0.2			Alan. W	12-16-03'
6-30	= ±0.4			CHECKED	DATE
30-120	= ±0.6			Alan. W	12-16-03'
120-315	= ±1			DRAWN	DATE
315-1000	= ±1.6			Enya	12-16-03'
1000-2000	= ±2.4				

Amphenol	
Danbury, CT, USA - Tainan, Taiwan - Shenzhen, China	
TITLE	SMZ POSITION LOCK CRIMP PLUG
DRAWING NO.	SMZ6111L3-N/3GT30G-FLEX-3-75
ITEM NO.	266111AAF37NP7F

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	3/1	ISSUE	B1	FILE NO. F:\DWG\SMZ\6111L3\FLEX3-75\N3GT30G-B1
-----	-------------	----------	--------	------	-------------	-------	-----	-------	----	--

7RD-DR 50047 8